

Specifications


| Type | Fuse link | | | | Fuse base | | |
|------|-------------------|-------------------|----------------------|-------------|-----------|---------------|-------------|
| | Rated current (A) | Rated voltage (V) | Rated power loss (W) | Weight (kg) | Type | Rated current | Weight (kg) |
| NT1 | 80 | 500,600 | 6.2 | 0.36 | Sist 201 | 250 | 0.8 |
| | 100 | | 7.5 | | | | |
| | 125 | | 10.2 | | | | |
| | 160 | | 13 | | | | |
| | 200 | 15.2 | | | | | |
| | 224 | 16.8 | | | | | |
| | 250 | 18.3 | | | | | |
| NT2 | 125 | 600 | 9 | 0.65 | Sist 401 | 400 | 1.2 |
| | 160 | | 11.5 | | | | |
| | 200 | | 15 | | | | |
| | 224 | | 16.6 | | | | |
| | 250 | | 18.4 | | | | |
| | 300 | | 21 | | | | |
| | 315 | | 19.2 | | | | |
| | 355 | | 24.5 | | | | |
| 400 | 26 | | | | | | |
| NT3 | 315 | 500,600 | 21.7 | 0.85 | Sist 601 | 630 | 1.5 |
| | 355 | | 22.7 | | | | |
| | 400 | | 26.8 | | | | |
| | 425 | 28.9 | | | | | |
| | 500 | 32 | | | | | |
| | 630 | 40.3 | | | | | |
| NT4 | 800 | 380 | 62 | 1.95 | Sist 1001 | 1000 | 3.45 |
| | 1000 | | 75 | | | | |



NT1



NT2

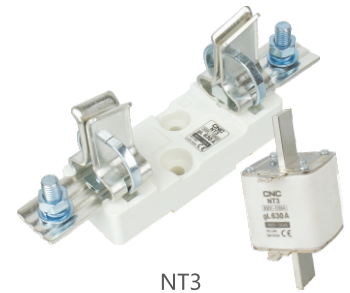

NT3



NT4



RT18-63 1P



RT18-63X 1P



RT18-63X 2P




Fuse Link

Fuse Holder

RT18

| Type | Assorted Fuse | Rated voltage (V) | Rated Current (V) | Weight (kg) | Dimension (mm) | | | | |
|-------------|---------------|-------------------|-------------------|-------------|----------------|-----|----|----|----|
| | | | | | A | B | C | D | E |
| RT18-32 1P | 10×38 | 380 | 32 | 0.075 | 82 | 78 | 35 | 63 | 18 |
| RT18-32 2P | | | 32 | 0.15 | 82 | 78 | 35 | 63 | 36 |
| RT18-32 3P | | | 32 | 0.22 | 82 | 78 | 35 | 63 | 54 |
| RT18-63 1P | 14×51 | | 63 | 0.18 | 106 | 103 | 35 | 80 | 26 |
| RT18-63 2P | | | 63 | 0.36 | 106 | 103 | 35 | 80 | 52 |
| RT18-63 3P | | | 63 | 0.54 | 106 | 103 | 35 | 80 | 78 |
| RT18-32X 1P | 10×38 | | 32 | 0.075 | 82 | 78 | 35 | 63 | 18 |
| RT18-32X 2P | | | 32 | 0.15 | 82 | 78 | 35 | 63 | 36 |
| RT18-32X 3P | | | 32 | 0.22 | 82 | 78 | 35 | 63 | 54 |
| RT18-63X 1P | 14×51 | | 63 | 0.18 | 106 | 103 | 35 | 80 | 26 |
| RT18-63X 2P | | 63 | 0.36 | 106 | 103 | 35 | 80 | 52 | |
| RT18-63X 3P | | 63 | 0.54 | 106 | 103 | 35 | 80 | 78 | |

Dimension

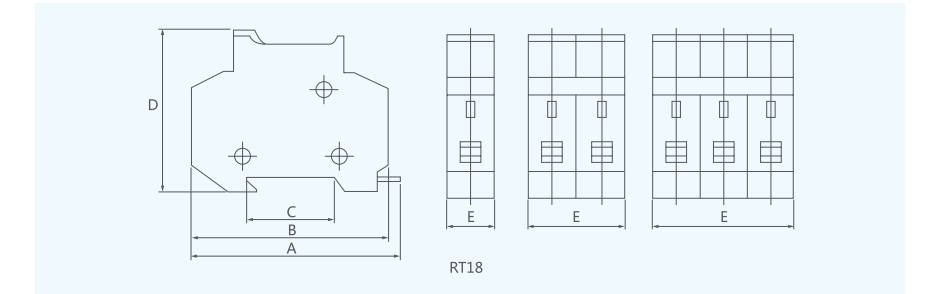

RT18-63X 2P



RT18-32 3P



RT18-32X 3P

Cylindrical Fuse

Technical Specifications

| Dimension (mm) | Rated current (A) | L | Hmax(mm) | ΦC |
|----------------|--------------------------------|----------------------------------|----------|----------|
| 8.5×31.5 | 2,4,6,10,16 | 31.5 ⁰ _{0.6} | 8.2 | 8.5±0.1 |
| 10×38 | 2,4,6,10,16,20,25,32 | 31.5±0.6 | 10.5 | 10.3±0.1 |
| 14×51 | 2,4,6,10,16,20,25,32,40,50,63 | 51 ⁰⁶ ₁₀ | 13.8 | 14.3±0.1 |
| 22×58 | 10,16,20,25,32,40,50,63,80,100 | 58 ¹⁰ ₂₀ | 16.2 | 22.2±0.1 |
| 30×58 | 63,80,100,125 | 58 ¹⁰ ₂₀ | 16.2 | 30±0.1 |