



Features:

- 4 Digit, 7 segment LED
- 0.001 Resolution

Size: 72mm x 72mm

Certifications: CE

Technical Specifications

Display

Display	7 segment LED Display
Digit	4
Digit Height	0.56" (14.2mm)

Input Specifications

Electrical Connection	1Ø - 2 wire
Measurement Range	0.250 - 6A (AC)
Over Voltage	1.5 x Vn continuous, 2 x Vn (3s)
Frequency	50 / 60 Hz
Resolution	0.001
Accuracy	± 0.5% (± 1 digit)

Supply Specifications

Auxiliary Supply	240V AC ±20%, (50 / 60Hz)
------------------	----------------------------


Environmental Specifications

Temperature	Operating: 0 to 50°C (32 to 112°F) Storage: 0 to 70°C (32 to 158°F)
Humidity (non-condensing)	Upto 85% RH


Mechanical Specifications

Mounting	Panel mount
Weight	170 g (0.374 lbs)
Protection Level	IP65 for faceplate

Dimensions

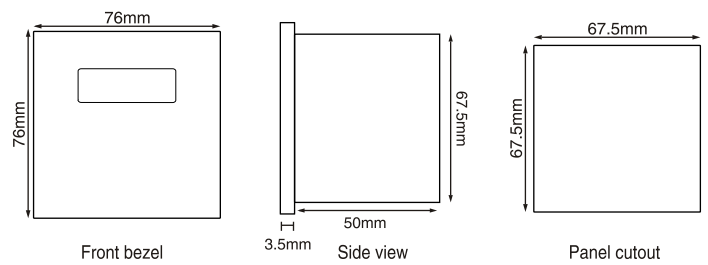

Terminal Connections

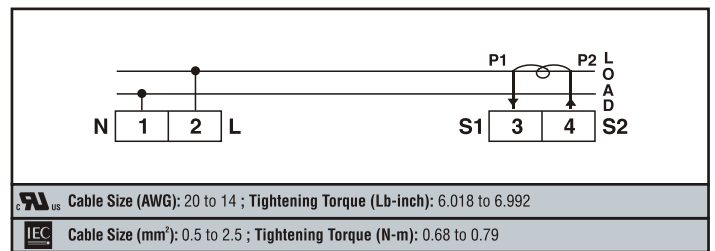

UL Cable Size (AWG): 20 to 14 ; Tightening Torque (Lb-inch): 6.018 to 6.992

IEC Cable Size (mm²): 0.5 to 2.5 ; Tightening Torque (N-m): 0.68 to 0.79

Ordering Information

Part No.	Supply Voltage
	240V AC
MP214	■